

X1000



LENS

- + PLATINUM® ASAF COATING
- + PANORAMIC FIELD OF VISION
- + BALLISTIC LENS



STRAP

- + PIVOT FOR HELMET WEARERS
- + QUICK RELEASE SYSTEM
- + MICROFIBRE POUCH AROUND

FRAME

- + HIGH HEAT RESISTANCE
- + TPV VENTILATED FRAME



BLACK FRAME
#X1NSTDI



SPARE LENS
#FAX1STDF



RX INSERT
#SOSX1000


106 g

+ SUPPLIED WITH MICROFIBRE POUCH AROUND THE STRAP AND INDIVIDUAL RIGID CARRY CASE.

The newest generation of low profile ballistic goggles, the X1000 goggle adapts to your every need. With choice of interchangeable lenses the X1000 goggle can be adapted for use with or without prescription spectacles. It is perfectly suited for use while wearing helmet, offering comfort, adaptability and protection. The X1000 is the ideal goggle for extreme situations.

PLATINUM® (P) ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

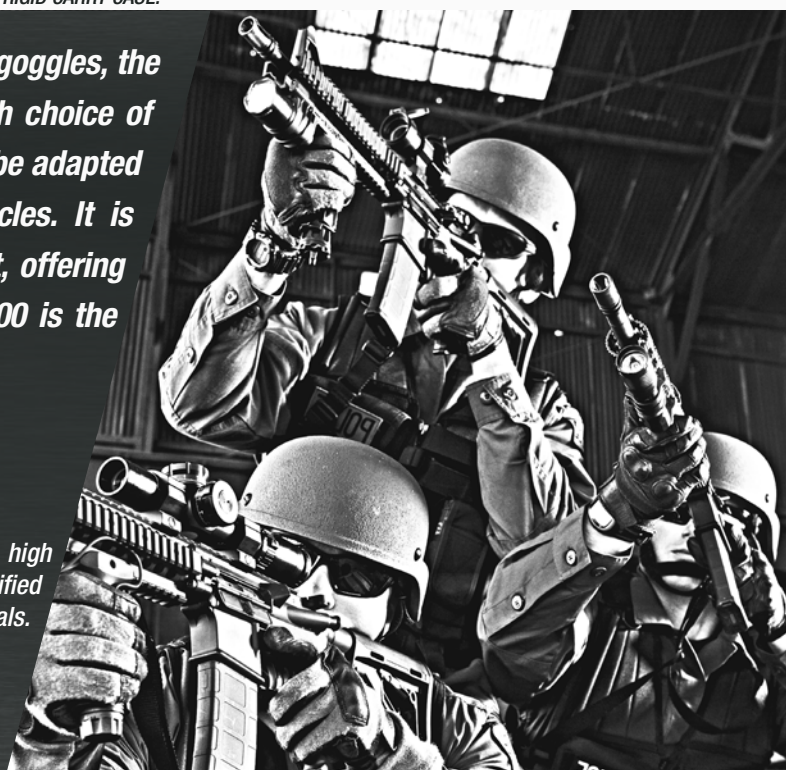

X1000



MODEL	VERSIONS	REFERENCE	LENS MARKINGS	FRAME MARKINGD	V50 BALLISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
X1000	Clear	X1NSTDI Black	2C-1.2 1 BT KN	EN166 3 BT	795 km/h - 220.7 m/s	ANSI Z87.1-2010 GL-PD-10-12	ASAF
X1000 Spare lens	Smoke	FAX1STDF	5-2.5 1 BT KN	-	782 km/h - 217.2 m/s	ANSI Z87.1-2010 GL-PD-10-12	ASAF
X1000 RX insert kit	RX insert	SOSX1000	-	-	-	-	-

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

Frame markings

Standards:

EN166, guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

3. Liquid droplets or splashes

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

	X1NSTDI	FAX1STDF	SOSX1000
EAN13 Unit pack	3660740005108	3660740005238	3660740000721
EAN13 Inner pack (number of unit per inner pack)	-	3660740105235 (15 unités)	3660740100728 (50 unitéxs)
Size // Weight Inner pack	-	24.3x18.3x9 cm 0.879 kg	34.7x16.2x9.2 cm 0.414 kg
EAN13 Master (number of unit per master pack)	3660740205102 (60 units)	3660740205232 (150 units)	3660740200725 (500 units)
Size // Weight Master pack	60x50x38 cm 17,9 kg	46,1x37x28 cm 10,2 kg	60x50x38 cm 6,5 kg

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

X1000	
Lens	PC - 3.0 mm - Curve 5
Frame	TPV
Strap	Adjustable 35 mm
Spare lens	-
Country of origin	Taiwan



WWW.BCBIN.COM
Email: info@bcb.in.com
Tel: +44 (0) 29 2043 3700