

# X810



## LENS

- + PANORAMIC VISUAL FIELD
- + WATERPROOF OR ULTRA-VENTILATED VERSION
- + COATING ASAF  PLATINUM



## STRAP

- + ADJUSTABLE STRAP
- + QUICK-RELEASE SYSTEM

## BRIDGE

- + ADAPTED FOR AN OPTICAL INSERT

Spare lenses on option:



CSP



Smoke




RX Insert




 120 g

+ Supplied with microfibre pouch around the strap and soft carry case (tan or black according to the version).

*Compatible with all types of helmets thanks to its low profile shape and its quick-release system, the X810 offers an array of innovations. Compact, panoramic and modular, in waterproof or ventilated version, the X810 offers protection for the most extreme situations. In its ventilated version, the X810 goggle provides the best resistance to fogging with its  PLATINUM<sup>®</sup> coating.*

### PLATINUM<sup>®</sup> () ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM<sup>®</sup> resists to the most aggressive chemicals.

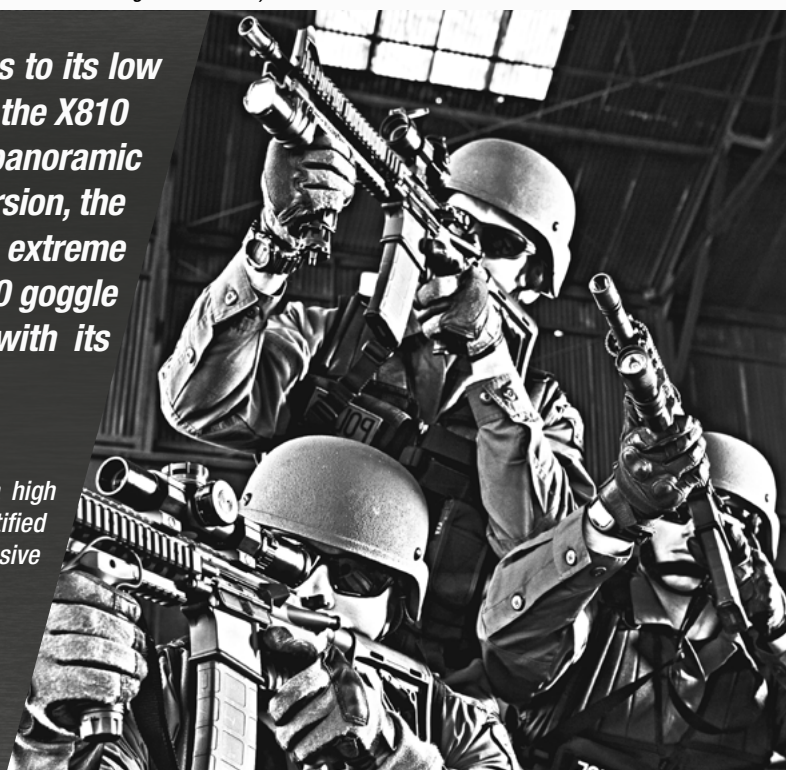

# X810



MODEL	REFERENCE	VERSION	LENS MARKINGS	FRAME MARKINGS	V50 BALLISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
<b>X810</b>	X810NPSI ■ Black	Clear	2C-1.2  1 BT KN	EN166 3 4 5 BT	900 km/h – 250 m/s	MIL-PRF-32432 ANSI Z87.1-2015 GL-PD-10-12	ASAF
<b>X810</b> ASIAN FIT	X810NPSIJP ■ Black	Clear	2C-1.2  1 BT KN	EN166 3 4 5 BT	900 km/h – 250 m/s	MIL-PRF-32432 ANSI Z87.1-2015 GL-PD-10-12	ASAF
<b>X810</b> Spare lens*	FAX810CSP	CSP	5-1.4  1 BT KN	-	929 km/h – 258 m/s	ANSI Z87.1-2010	ASAF
<b>X810</b> Spare lens*	FAX810PSF	Smoke	5-3.1  1 BT KN	-	929 km/h – 258 m/s	ANSI Z87.1-2010	ASAF
<b>X810</b> Optical Insert Kit	TACTICALRXKIT	RX insert					

## Lens markings

### Optical class symbols:

1. Continuous work

### Mechanical strength symbols:

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

### Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

## Frame markings

### Standards:

**EN166.** guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

### Mechanical strength symbols:

3. Liquid droplets or splashes

4. Large dust particles > 5 microns

5. Gas and fine dust particles < 5 microns.

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

### Others symbols:

	X810NPSI	X810NPSIJP	FAX810CSP	FAX810PSF
<b>EAN13 Unit pack</b>	3660740006808	4580279034778	3660740207991	3660740006846
<b>EAN13 Inner pack</b> (number of unit per inner pack)	-	-	-	-
<b>Size // Weight</b> Inner pack	-	-	-	-
<b>EAN13 Master</b> (number of unit per master pack)	3660740206802 (60 units)	4580279034778 (60 units)	3660740207991 (180 units)	3660740206840 (180 units)
<b>Size // Weight</b> Master pack	60x50x40 cm 17.9 kg	60x50x40 cm 17 kg	47x37x30 cm 10.10 kg	47x37x30 cm 10.10 kg

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product.

After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

X810	
<b>Lens</b>	PC - 3 mm - Curve 9
<b>Frame</b>	PC + TPR
<b>Strap</b>	Adjustable 35 mm
<b>Spare lens</b>	-
<b>Country of origin</b>	Taiwan



**WWW.BCBIN.COM**  
**Email: info@bcbin.com**  
**Tel: +44 (0) 29 2043 3700**